

# Wiring Harness Kits & Accessories

## NX200

### Product Information


<b>Description</b>	12V & 24V Wiring Harness Kit - For 2 x Driving Lights
<b>Height</b>	250 mm / 9.84 in
<b>Width</b>	115 mm / 4.53 in
<b>Depth</b>	80 mm / 3.15 in
<b>Shape</b>	Rectangular
<b>Connector or Wiring</b>	For installation of 2 x Noxsolis driving lights
<b>Shipping Weight</b>	1.59 lbs / 0.72 kgs



### Product Dimensions

## DESCRIPTION

- A** Relay (4-Pin 12V DC 40A)
- B** Fuse Holder
- C** Blade Fuse (30A)
- D** Red Eyelet
- E** Black Eyelet
- F** 3-Pin Rocker Switch
- G** 3-Pin Female Connector
- H** 3-Pin Male Connector
- I** 2-Pin Deutsch DT Connector Socket
- J** High Beam Connection
  - Option 1:** Bare Cable (into high beam circuit)
  - Option 2:** H4 / HB3 Adaptor Cable

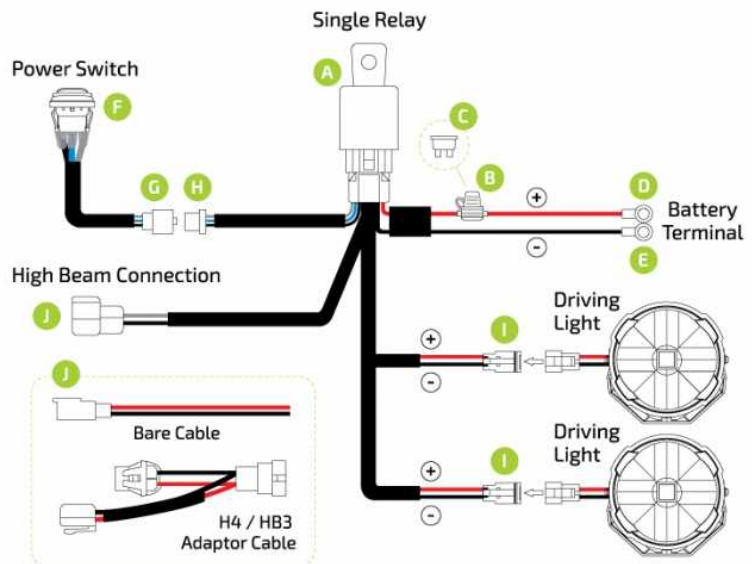


## NOTICE FOR SWITCH

- ▶ The switch was connected to the wiring harness by default:
  - **White wire (+)** to the prong with one hole on edge.
  - **Black wire (-)** to the prong with two holes.
  - **Blue wire (Trigger)** to the prong with one hole in middle.
- ▶ If you want to use with other switches instead, please make sure all three wires are connected correctly.

## CAUTION

- ▶ The Max Load Current for this wiring harness is 24 Amp (12 Amp per lead), please make sure the max current load for your light is less than this.
- ▶ This wiring harness comes with a 30 Amp blade fuse. You can change it to another proper fuse for your needs.

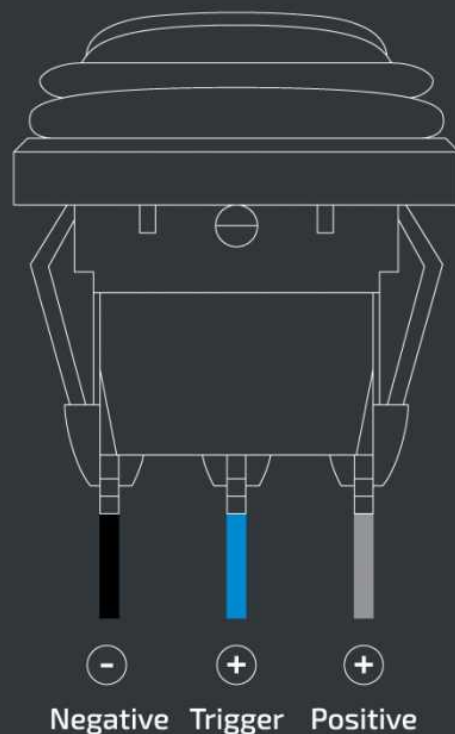

Electrical Specifications

**Operating Voltage** 12V DC

Photometric Specifications

**Beam Pattern(s)** Forward Lighting - Driving



Additional Specifications

**IP Rating** IP69K  
**Warranty** 3 Years  
**Pack Quantity** 1